


RAMWRAP

PIPE AND TANK INSULATION

DESCRIPTION:

RAMWRAP IS FIBERGLASS OR MINERAL FIBER BONDED TO FLEXIBLE VAPOR RETARDENT JACKETING. THE INSULATION IS CUT TO ORIENT THE FIBERS PERPENDICULAR TO THE FACING MATERIAL WHICH ENHANCES COMPRESSIVE STRENGTH.

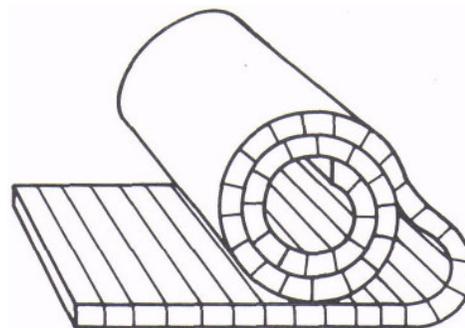


USES:

CAN BE APPLIED TO CURVED OR FLAT SURFACES SUCH AS PIPING, DUCTS, TANKS, AND OTHER SHAPES LARGER THAN 10 INCHES IN DIAMETER. THIS PRODUCT CAN BE USED OVER OTHER INSULATION WHEN ADDITIONAL THICKNESS IS REQUIRED.

THERMAL CONDUCTIVITY, K (ASTM-C-177)

THERMAL CONDUCTIVITY, K (ASTM-C-1

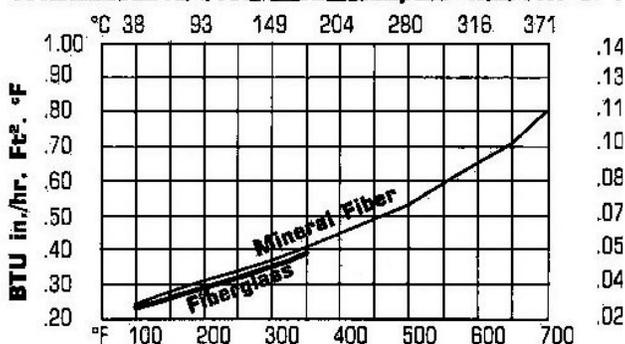

AVAILABLE SIZES & TYPES:

	STANDARD THICKNESS				
	1"	1 1/2"	2"	2 1/2"	3"
ROLL LENGT (FEET)	42	27	20	16	12
SQ. FT. PER ROLL	126	81	60	48	36

METHOD FOR DETERMINING LENGTH TO CUT FOR ALL PIPE SIZES

1. ADD TWICE INSULATION THICKNESS TO DIAMETER OF PIPE.
2. MULTIPLY BY 3.1416.
3. ADD 2" TO 4" FOR LAP DESIRED.

FACINGS:

ASJ • FSK • GLASS MAT

SPECIFICATIONS:

FEDERAL SPEC HH-1-558B
 ASTM E 84
 25 OR LESS FLAME SPREAD 50 OR LESS SMOKE DEVELOPED

PRECAUTIONS:

CARE SHOULD BE TAKEN TO KEEP ASJ OR FSK JACKETS AT 150°F OR BELOW.

RAMCO INSULATION, INC
 Box 2173, Joplin, MO 64803
 417-781-8855 Office 417-781-9192 FAX
www.ramcoinsulationproducts.com