


# RAMWRAP

## PIPE AND TANK INSULATION

### DESCRIPTION:

RAMWRAP IS FIBERGLASS OR MINERAL FIBER BONDED TO FLEXIBLE VAPOR RETARDANT JACKETING. THE INSULATION IS CUT TO ORIENT THE FIBERS PERPENDICULAR TO THE FACING MATERIAL WHICH ENHANCES COMPRESSIVE STRENGTH.

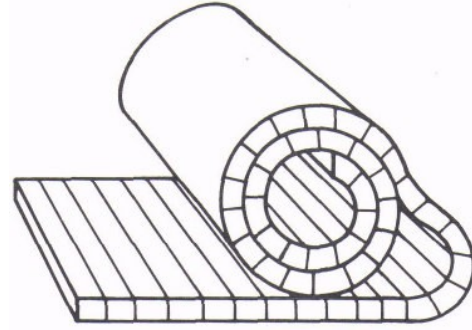

### USES:

CAN BE APPLIED TO CURVED OR FLAT SURFACES SUCH AS PIPING, DUCTS, TANKS, AND OTHER SHAPES LARGER THAN 10 INCHES IN DIAMETER. THIS PRODUCT CAN BE USED OVER OTHER INSULATION WHEN ADDITIONAL THICKNESS IS REQUIRED.

### AVAILABLE SIZES & TYPES:


	STANDARD THICKNESS				
	1"	1 1/2"	2"	2 1/2"	3"
ROLL LENGT (FEET)	42	27	20	16	12
SQ. FT. PER ROLL	126	81	60	48	36

### FACINGS:

ASJ • FSK • GLASS MAT

### THERMAL CONDUCTIVITY, K (ASTM-C-177)

#### THERMAL CONDUCTIVITY, K (ASTM-C-1)

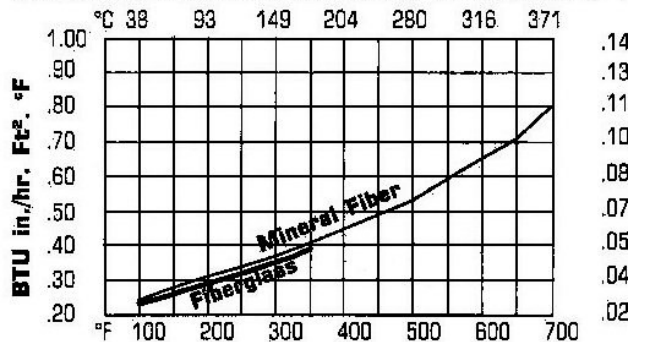

### METHOD FOR DETERMINING LENGTH TO CUT FOR ALL PIPE SIZES

1. ADD TWICE INSULATION THICKNESS TO DIAMETER OF PIPE.
2. MULTIPLY BY 3.1416.
3. ADD 2" TO 4" FOR LAP DESIRED.

### SPECIFICATIONS:

FEDERAL SPEC HH-1-558B  
ASTM E 84

25 OR LESS FLAME SPREAD 50 OR LESS SMOKE DEVELOPED

### PRECAUTIONS:

CARE SHOULD BE TAKEN TO KEEP ASJ OR FSK JACKETS AT 150°F OR BELOW.

## RAMCO INSULATION, INC

Box 2173, Joplin, MO64803

417-781-8855 Office

417-781-9192 FAX

www.ramcoinsulation.com